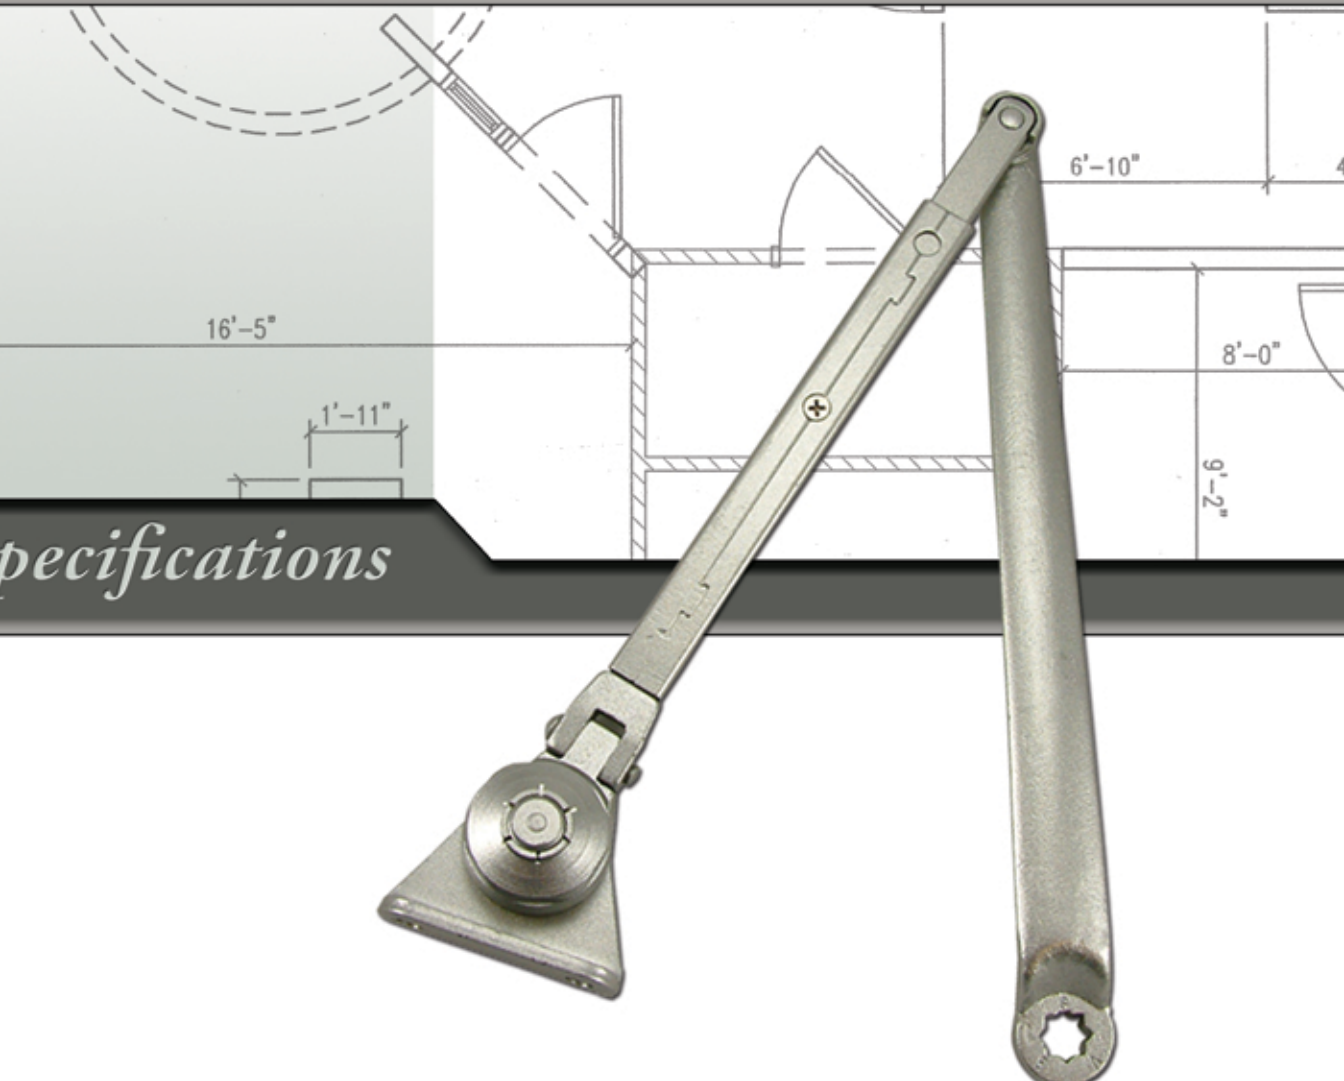


416 Friction Hold Open Arm

Specifications

- 
- Base Material :** Forged & stamped steel
Application : Used to hold open doors in non UL Fire Rated applications
Controls : Hold Open Function using friction type fitting under nut which also allows for multiple hold open positions
Handing : Non-handed
Mounting : Regular, Top Jamb & Parallel Arm (includes PA bracket)
Adjustability : Two arm length positions allow for different jamb depths
Finishes : AL, BZ & GLD painted finishes
Fasteners : Machine, wood and self tapping machine screws
Warranty : Limited lifetime warranty