


AS-1

Overlapping Meeting Stile Astragal

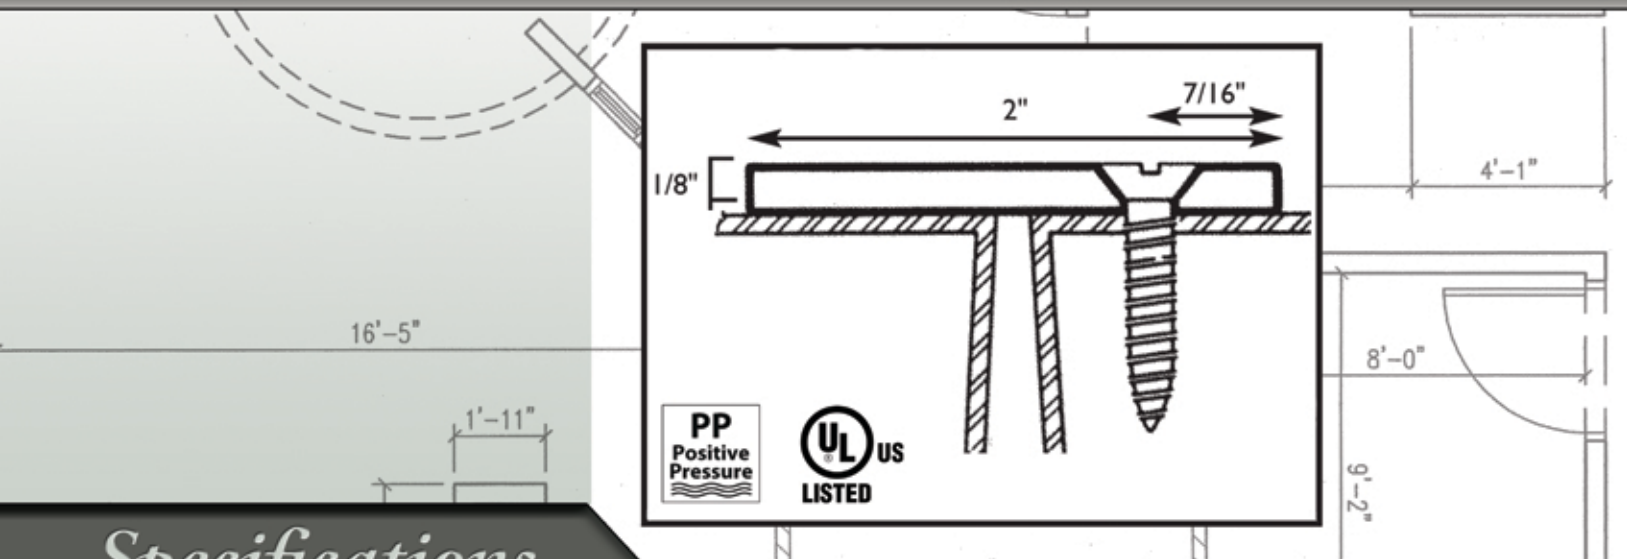

Specifications

Material : 6063-T5 Extruded Aluminum Alloy

Application : Used at meeting stiles on pairs of doors to help maintain NFPA 80

UL Ratings : Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours

UL Positive Pressure : Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476
Smoke Tested & Listed to meet the requirements of Standards
UL 1784 UBC7-2, Part II and BS476

Width : 2"

Thickness : 1/8"

Stock Length : 84", 96" (stock)

Non Stock Lengths : 80", 108", 120" (special order)

Stock Finishes : AA = Clear Anodized (stock)

BZ = Bronze Anodized (stock)

Fasteners : #10 x 1" sheet metal screws provided

Warranty : Limited 3 Year