


# SW-R

## Door Sweep - Rubber

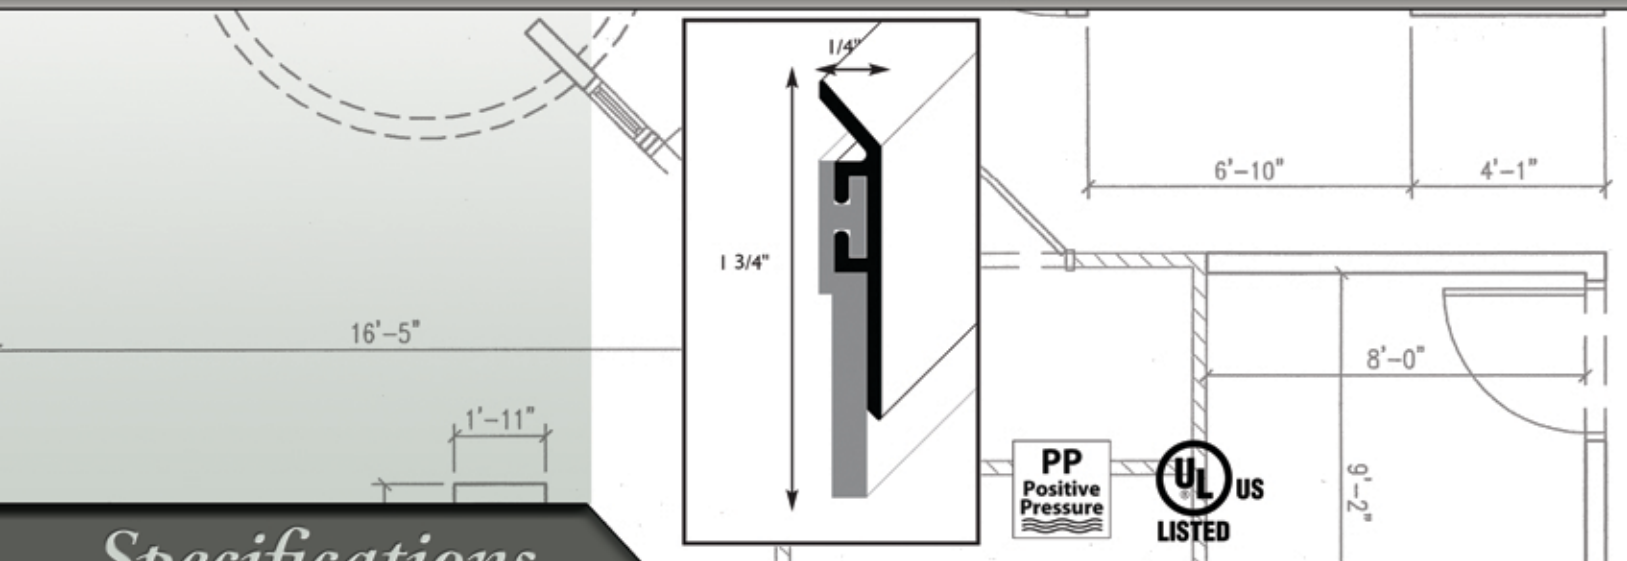

### Specifications

- Material :** 6063-T5 Extruded Aluminum Alloy
- Sweep Material :** Heavy Duty Rubber
- UL Ratings :** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
- UL Positive Pressure :** Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476  
Smoke Tested & Listed to meet the requirements of Standards  
UL 1784 UBC7-2, Part II and BS476
- Height :** 1 3/4"
- Thickness :** 1/4"
- Stock Lengths :** 36" & 48" (stock)
- Non Stock Lengths :** 32", 42" (special order)
- Stock Finishes :** MF = Mill finish (stock)  
BZ = Bronze anodized (stock)
- Fasteners :** #6 x 5/8" sheet metal screws provided
- Warranty :** Limited 3 Year