


# TH5P

## 5" Panic Threshold

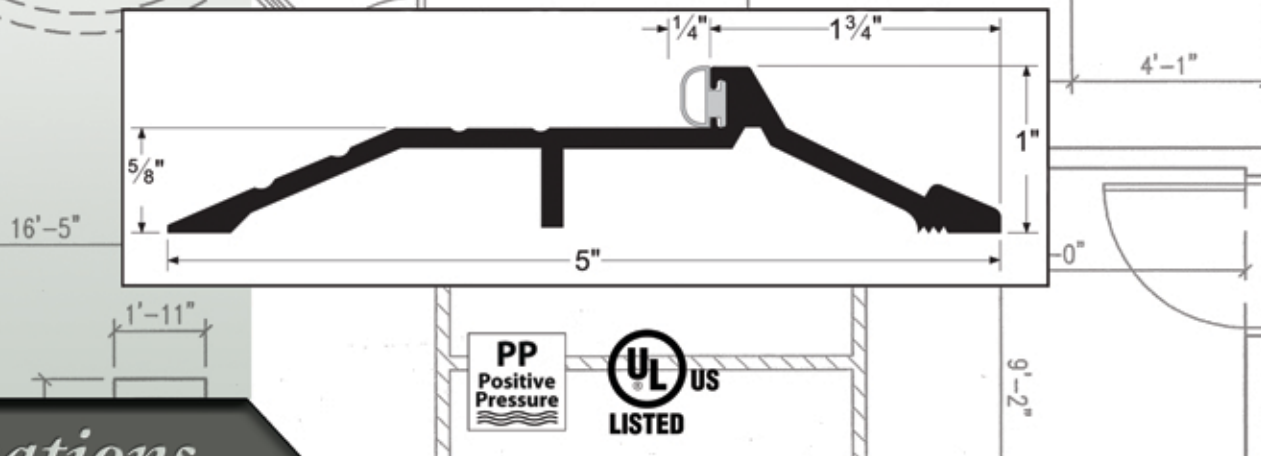

## Specifications

**Material :** 6063-T5 Extruded Aluminum Alloy

**UL Ratings :** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours

**UL Positive Pressure :** Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476  
Smoke Tested & Listed to meet the requirements of Standards  
UL 1784 UBC7-2, Part II and BS476

**Width :** 5"

**Height :** 1"

**Stock Lengths :** Stocked as 36" & 48" (cut 1/2" over) & 72" & 96" (cut 1" over)

**Non Stock Lengths :** Special order: 32" (cut 1/2" over)  
Special order: 60" 64", 84" (cut 1" over)

**Stock Finishes :** MF = Mill finish (stock)  
BZ = Bronze anodized (stock)

**Fasteners :** #10 Phillips wood screws

**Warranty :** Limited 3 Year