


SS-S SANTOPRENE SMOKE SEAL

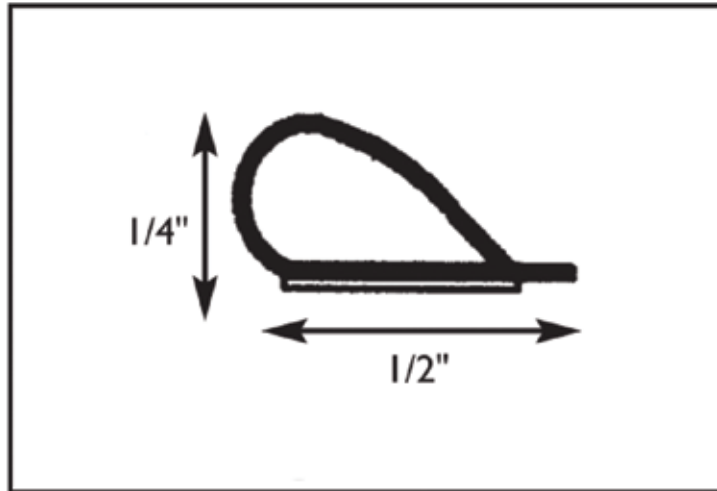

Specification

Material: Extruded Thermoplastic Rubber Santoprene #251-80

Features: Excellent resistance to compression set, ozone, ultraviolet exposure, fungus and mildew
Flame Retardent

UL Ratings: Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

UL Positive Pressure: Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards
UL 1784 UBC7-2, Part II and BS476

Width: 1/2"

Height: 1/4"

Stock Lengths: 17' Roll & 21' Roll (25' Roll available for Brown)

Stock Colors: Brown & White

Non Stock Colors: Black

Fasteners: Self Adhesive backing installs easily to door frame

Warranty: Limited 3 Year