


CYLINDRICAL REX INSTRUCTIONS

INSTALLATION INSTRUCTIONS

Z SERIES CYLINDRICAL REX (REQUEST TO EXIT) MONITORING.

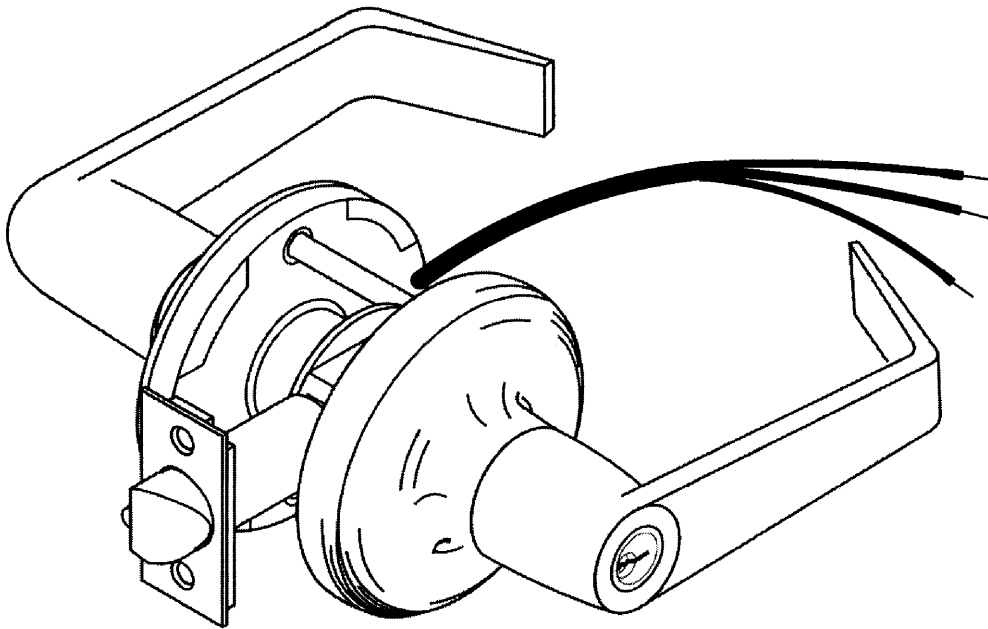

TERMINATE THE WIRES FROM LOCK TO THE ELECTRIC POWER TRANSFER DEVICE USING 22 AWG WIRE. USE PROPER CRIMP SPLICES OR WIRE NUTS FOR TERMINATING CONNECTIONS.

3 - WIRE REX MODIFICATION UTILIZES A UL RECOGNIZED SPDT SWITCH PROVIDING A CHOICE OF:

- NORMALLY CLOSED OPERATION USE THE YELLOW (COM.) & GRAY WIRES
- NORMALLY OPEN OPERATION USE THE YELLOW (COM.) & RED WIRES

ELECTRICAL SPECIFICATIONS

- 30 VDC @ 2 AMP MAXIMUM
- 125 VAC @ 3 AMP MAXIMUM
- WIRE LEADS: 22 AWG

