

CONTINUOUS GEARED HINGES



Specification

Base Material: 6063 T6 aluminum alloy

Types: Full Mortise and Full Surface

Handing: Non-handed (unless cut in the field)

Stock Lengths: 83" and 95"

Stock Finishes: AL= Aluminum Anodized and BZ = Dark Bronze Anodized
Anodizing is done after machining to help reduce wear

Templating: Templated hole patterns

Fasteners: 12-24 x 7/8" Self tapping machine screws

Features: 32 Self lubricating concealed bearings per hinge for heavy duty applications


Eliminates door sag and binding

Adds higher degree of security over standard hinges


Low operating force helps opening to meet ADA

Adds reinforcement to both door and frame


Warranty: 10 year warranty




Full Mortise



Full Mortise Offset



Full Surface

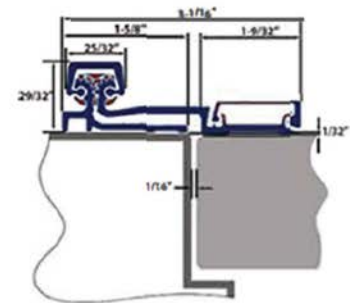

Full Surface Offset