


# AS-1

# OVERLAPPING MEETING STILE ASTRAGAL

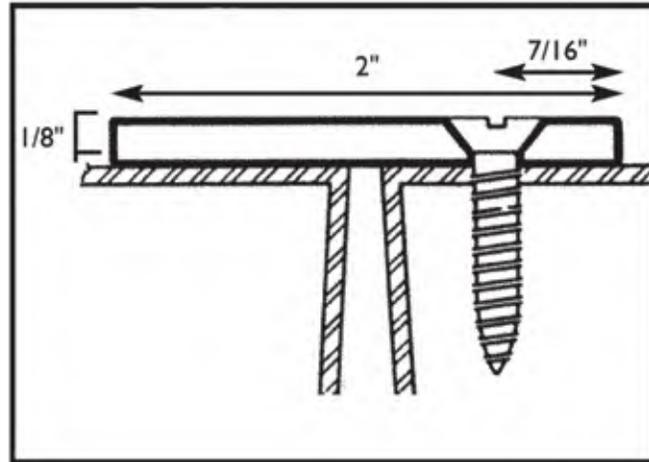

## Specification

**Material:** 6063-TS Extruded Aluminum Alloy

**Applications:** Used at meeting stiles on pairs of doors to help maintain NFPA 80

**UL Ratings:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

**UL Positive Pressure:** Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476

**Width:** 2"

**Thickness:** 1/8"

**Stock Lengths:** 84" & 96"

**Stock Finishes:** AA= Clear Anodized  
BZ = Bronze Anodized

**Fasteners:** #10 x 1" sheet metal screws provided

**Warranty:** Limited 3 Year