
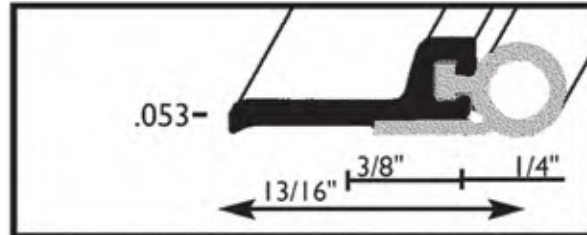


PS-V PERIMETER SEAL - VINYL BULB

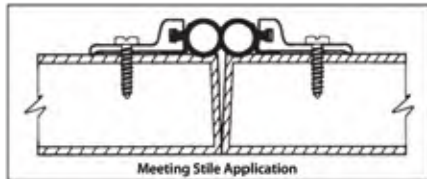

Specification

- Material:** 6063-TS Extruded Aluminum Alloy
- Heavy Duty Vinyl:** Flexible to -35 degrees (ASTM 0746), Tear resistant (ASTM-1004) at 50lbs/in Elongation 300% (ASTM O-412), Tensile strength (ASTM O-412) 1800psi
- Features:** Flat mount style with 3/8" secondary seal
- UL Rating:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours
- UL Positive Pressure:** Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
- Width:** 13/16" overall x 1/4" x 1/4" vinyl bulb
- Size Options:** (1) 36" piece & (2) 84" pieces for single doors
(1) 48" piece & (2) 84" pieces for single doors (1) 72" piece & (2) 84" pieces for pairs of doors
(3) 96" pieces for pairs of doors
- Stock Finishes:** MF= Mill finish
BZ = Bronze anodized
- Fasteners:** #6 x 5/8" sheet metal screws provided and installed in slotted holes 7"-9" apart and not more than 3" from end
- Warranty:** Limited 3 Year