


# SS-S SANTOPRENE SMOKE SEAL

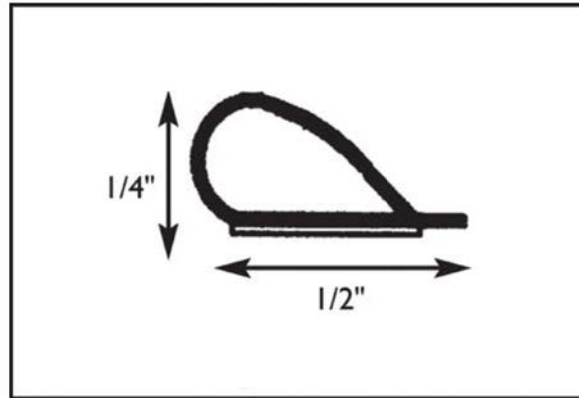

## Specification

**Material:** 6063-TS Extruded Aluminum Alloy

**Features:** Excellent resistance to compression set, ozone, ultraviolet exposure, fungus and mildew  
Flame Retardent

**UL Ratings:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

**UL Positive Pressure:** Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards  
UL 1784 UBC7-2, Part II and BS476

**Width:** 1/2"

**Height:** 1/4"

**Stock Lengths:** 17' Roll & 21' Roll (25' Roll available for Brown)

**Stock Colors:** Brown & White

**Non Stock Colors:** Black

**Fasteners:** Self Adhesive backing installs easily to door frame

**Warranty:** Limited 3 Year