


SW-R DOOR SWEEP-RUBBER

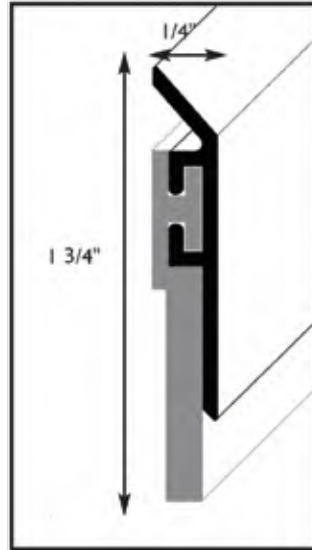

Specification

- Material:** 6063-T5 Extruded Aluminum Alloy
- Sweep Material:** Heavy Duty Rubber
- UL Rating:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours
- UL Positive Pressure:** Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
- Height:** 1 3/4"
- Thickness:** 1/4"
- Stock Lengths:** 36" & 48"
- Stock Finishes:** MF= Mill finish
BZ = Bronze anodized
- Fasteners:** #6 x 5/8" sheet metal screws provided
- Warranty:** Limited 3 Year