


SW-R DOOR SWEEP-RUBBER

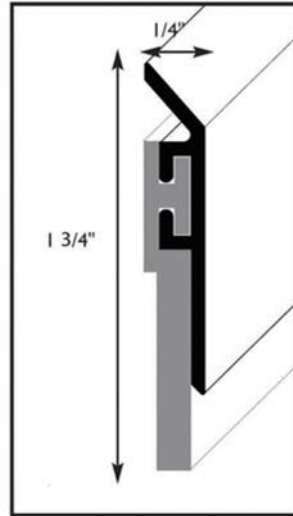

Specification

Material: 6063-T5 Extruded Aluminum Alloy

Sweep Material: Heavy Duty Rubber

UL Rating: Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

UL Positive Pressure: Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476

Height: 1 3/4"

Thickness: 1/4"

Stock Lengths: 36" & 48" (stock)

Non Stock Lengths: 32" & 42" (special order)

Stock Finishes: MF= Mill finish (stock)
BZ = Bronze anodized (stock)

Fasteners: #6 x 5/8" sheet metal screws provided

Warranty: Limited 3 Year