


# TH5-ADA 5" SADDLE THRESHOLD

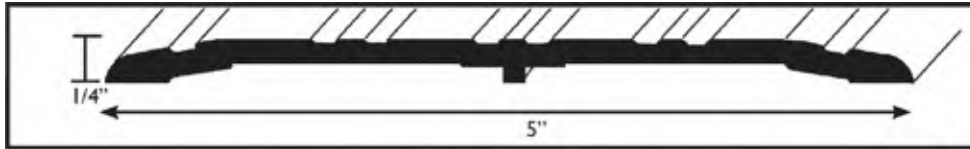

## Specification

**Material:** 6063-T5 Extruded Aluminum Alloy

**UL Rating:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours

**UL Positive Pressure:** Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476

**ADA:** Meets ANSI A117.1 accessibility codes

**Width:** 5"

**Height:** 1/4"

**Stock Lengths:** Stocked as 36", 48" (cut 1/2" over) & 72" & 96" (cut 1" over)

**Stock Finishes:** MF = Mill finish

**Fasteners:** #10 Phillips wood screws provided

**Warranty:** Limited 3 Year