


TH5P 5" PANIC THRESHOLD

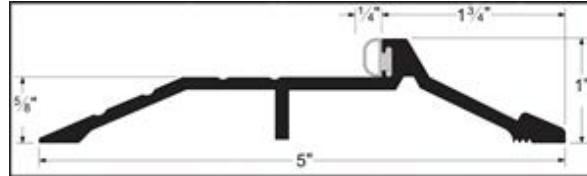

Specification

Material: 6063-T5 Extruded Aluminum Alloy

UL Rating: Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours

UL Positive Pressure: Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476

Width: 5"

Height: 1"

Stock Lengths: Stocked as 36" & 48" (cut 1/2" over) & 72" & 96" (cut 1" over)

Non Stock Lengths: Special order: 32" (cut 1/2" over)
Special order: 60" 64", 84" (cut 1" over)

Stock Finishes: MF= Mill finish (stock)
BZ = Bronze anodized (stock)

Fasteners: #10 Phillips wood screws provided

Warranty: Limited 3 Year