


TH5 5" SADDLE THRESHOLD

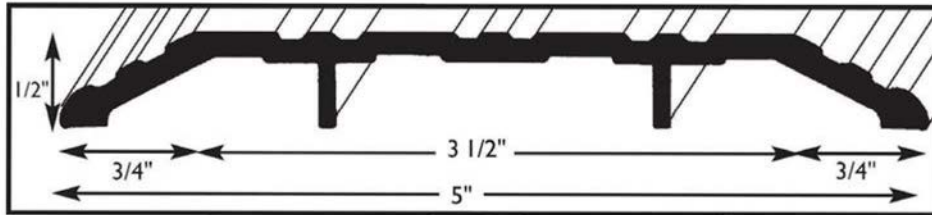

Specification

Material: 6063-TS Extruded Aluminum Alloy

UL Rating: Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

UL Positive Pressure: Fire Rated & Tested to meet UL 10B & UL 10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476

ADA: Meets ANSI A117.1 accessibility codes

Width: 5"

Height: 1/2"

Stock Lengths: Stocked as 36", 48" (cut 1/2" over) & 72" & 96" (cut 1" over)

Non Stock Lengths: Special order: 32" (cut 1/2" over)
Special order: 60", 64", 84" (cut 1" over)

Stock Finishes: MF= Mill finish (stock)
BZ = Bronze anodized (stock)

Fasteners: #10 Phillips wood screws provided

Warranty: Limited 3 Year