


# TH5P-ADA 5" ADA PANIC THRESHOLD

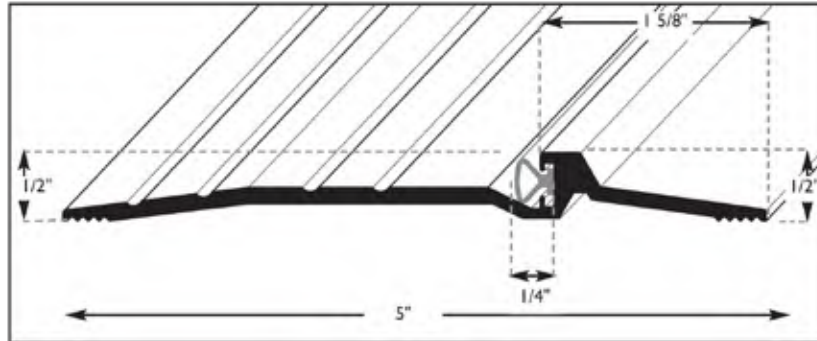

## Specification

**Material:** 6063-T5 Extruded Aluminum Alloy

**UL Rating:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2 hours

**UL Positive Pressure:** Fire Rated & Tested to meet UL 108 & UL IOC, UBC7-2, Part 1 & BS476  
Smoke Tested & Listed to meet the requirements of Standards  
UL 1784 UBC7-2, Part II and 8S476

**ADA:** Meets ANSI A117 .1 accessibility codes

**Width:** 5"

**Height:** 1/2"

**Stock Lengths:** Stocked as 36" & 48" Mill finish (cut 1/2" over)

**Stock Finishes:** MF= Mill finish

**Fasteners:** #10 Phillips wood screws provided

**Warranty:** Limited 3 Year