


TH5-ADA 5" SADDLE THRESHOLD

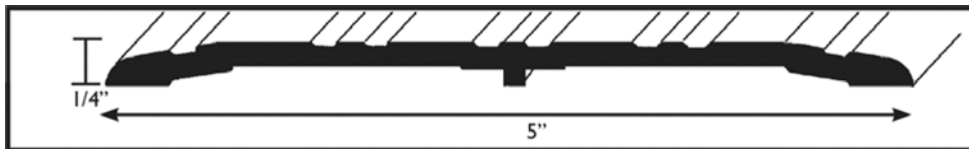

Specification

- Material:** 6063-T5 Extruded Aluminum Alloy
- UL Rating:** Classified by UL and intended for application to hollow metal fire doors rated up to and including 3 hours, and wood doors rated up to 1 1/2" hours
- UL Positive Pressure:** Fire Rated & Tested to meet UL10B & UL10C, UBC7-2, Part 1 & BS476 Smoke Tested & Listed to meet the requirements of Standards UL 1784 UBC7-2, Part II and BS476
- ADA:** Meets ANSI A117.1 accessibility codes
- Width:** 5"
- Height:** 1/4"
- Stock Lengths:** Stocked as 36", 48" (cut 1/2" over) & 72" & 96" (cut 1" over)
- Non Stock Lengths:** Special order: 32" (cut 1/2" over)
- Special Order:** 60" 64", 84" & 96" (cut 1" over)
- Stock Finishes:** MF = Mill finish (stock)
- Special Order Finishes:** BZ = Bronze anodized (stock)
- Fasteners:** #10 Phillips wood screws provided
- Warranty:** Limited 3 Year