

D2 SERIES FUNCTIONS & OPTIONS



Standard Cylinder



D2-S Single Cylinder
D2-D Double Cylinder
D2-S-BP Single Cyl. x Blank Plate

Prepared for IC Core



D2-S-IC Single Cylinder
D2-D-IC Double Cylinder
D2-S-IC-BP Single Cyl. x Blank Plate


Non Keyed



D2-BP-T Blank Plate x Thumbturn
D2-IND Indicator x Thumbturn

Outside/ Inside	Series/ Function	Type	ANSI No.	Function Description
	D2-S D2-S-IC	Single Cyl.	E21522	Deadbolt thrown or retracted by key from outside or by inside thumbturn. Bolt automatically deadlocks when thrown.
	D2-D D2-D-IC	Double Cyl.	E21412	Deadbolt thrown or retracted by key from either side. Bolt automatically deadlocks when fully thrown.
	D2-BP-T	Single Cyl. x Blank Plate	E01112	Deadbolt thrown or retracted by thumbturn only. Outside blank plate. Bolt automatically deadlocks when fully thrown.
	D2-S-BP D2-S-IC-BP	Single Cyl. x Blank Plate	E01622	Deadbolt thrown or retracted by key only. Blank plate inside. Bolt automatically deadlocks when fully thrown.
	D2-IND	Indicator x Thumbturn		Deadbolt thrown or retracted by thumbturn only. Outside indicator "IN USE/VACANT". Bolt automatically deadlocks when fully thrown.

Stock Finishes

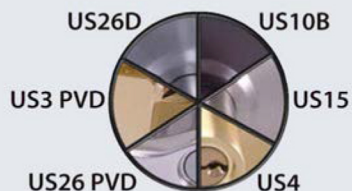

US3*	Bright/Polished Brass *PVD
US4	Brushed/Satin Brass
US108	Oil Rubbed Bronze
US26D	Brushed/Satin Chrome
US15	Brushed/Satin Nickel

*PVD Lifetime Finish Standard on US3 and US26 finishes.
PVD = Physical Vapor Deposition

How to Order

Series Function Finish

D2 - S-IC - US26D

Function Codes

S = Single Cylinder
D = Double Cylinder
IC = Prepared for IC Cores
BP = Blank Plate
T = Thumbturn