

Continuous Geared Hinge

Standard & Retrofit Options

Our continuous geared hinges feature 32 self-lubricating ball bearings per hinge for heavy duty applications. These non-handed hinges eliminate door sagging, add reinforcement to both the door and frame with a low operating force to help your opening meet ADA standards.

Speed

83" and 95" lengths as well as AL or BZ finishes in stock and ready to ship.

Service



Our Continuous Geared Hinge is backed by a 10 year warranty and our excellent customer support.

Flexibility


Available in AL and BZ finishes, able to be installed in four different configurations and can be customized using templated hole patterns for a new installation or retrofit.

Pricing


Our Continuous geared hinge is competitively priced to keep your project on budget.

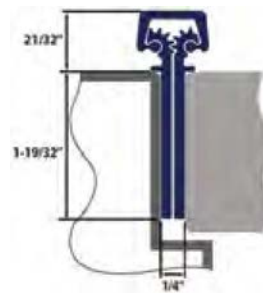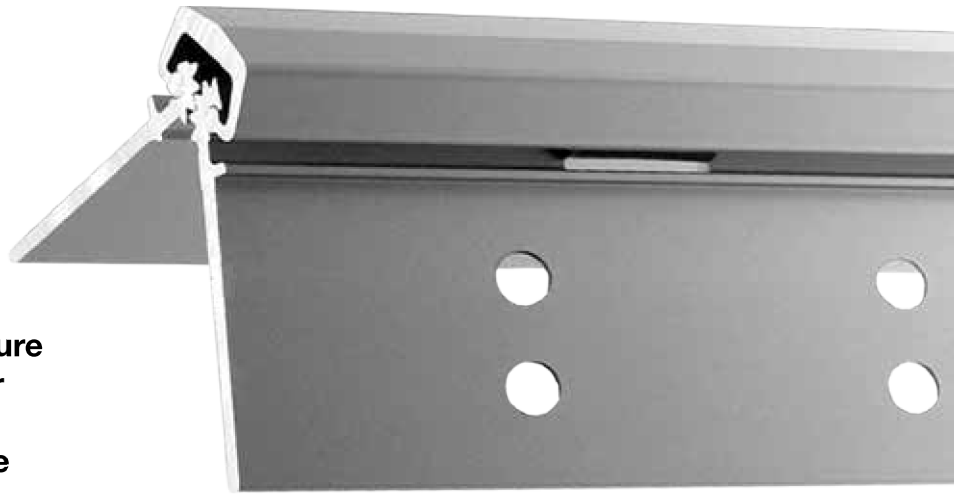


Full Mortise

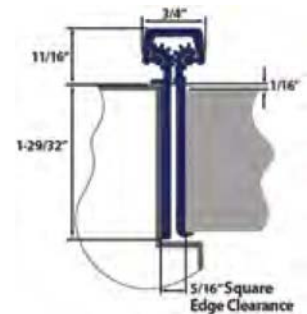

Full Mortise Offset

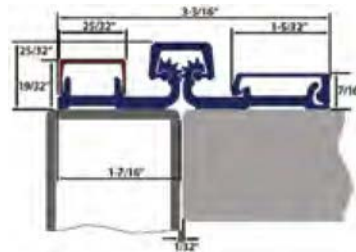

Full Surface

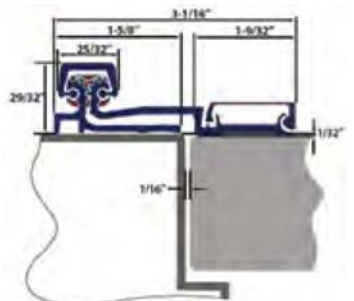

Full Surface Offset