

# KRM KEY REMOVABLE MULLION




Top Retainer



Bottom Retainer



Headcap Assembly

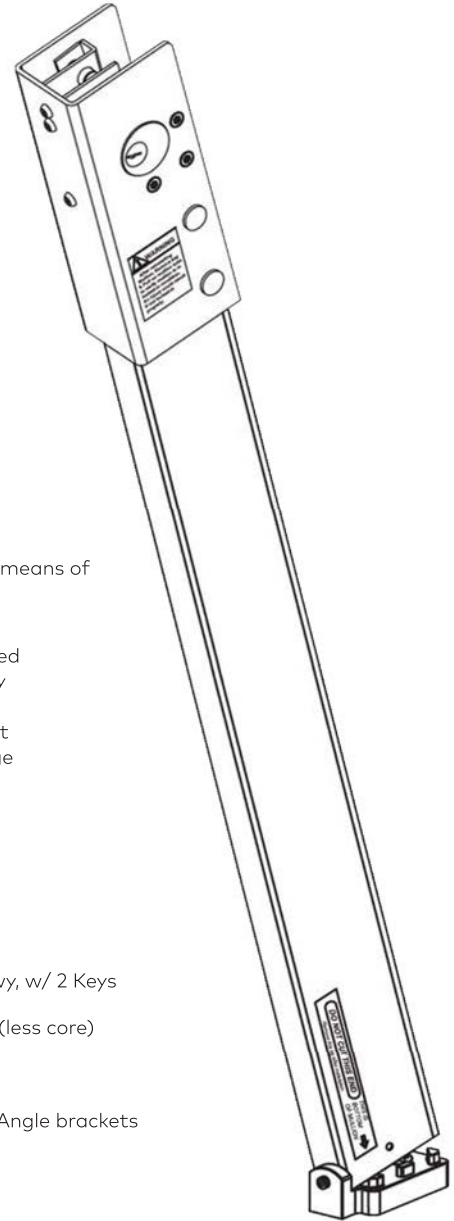

## Specification

**Application:** Used to adapt a double door into two single doors

**Key Operation:** Turning key in mortise cylinder provides fast and easy means of removing mullion from opening

- Features:**
- Heavy Duty Steel construction
  - Easy removal when full width of an opening is required
  - Self locking when reinstalled without needing the key
  - Flush side mounted cylinder is not visible from front
  - Includes 1/8" adjustment shim for fine tuning fitment
  - Increases Security & Minimizes door sag and warpage

**Mullion Tube:** 2" Wide x 3" Depth x 1/8" Steel

**Top/Btm. Retainers:** Investment cast steel

**Headcap:** Steel with zinc dichromated internal parts

**Lengths:** 7', 8' & 10' lengths - can be cut to length in field

**Cylinders:** 1 1/8" Mortise Cyl. w/ std. cam (included) - 6 Pin, C Kwy, w/ 2 Keys

**Optional Cylinders:** 1 3/8" Mortise Cyl. for 6 or 7 pin Small format IC core (less core)

**Finishes:** AL Painted (Prime Coat)

**Accessories:** Stabilizers, Wall mounted storage kits, Filler blocks & Angle brackets

**Warranty:** Limited lifetime warranty