

# Z Series Functions & Options



## Available Lever Styles



**Flat Lever**  
Stocked in US26D



**Curved Lever**  
Stocked in US26D




**IC Flat Lever**  
Stocked in US26D



**IC Curved Lever**  
Stocked in US26D

Outside / Inside	Series/ Function	Type	ANSI No.	Function Description
	Z-75	Passage	F75	Latchbolt operated by lever from either side at all times.
	Z-76	Privacy	F76	Latchbolt operated by lever from either side. Outside lever is locked by push button inside and unlocked by emergency release outside, rotating inside lever or closing door.
	Z-82 Z-82IC	Entry/ Office	F82	Turn / Push button locking. Pushing and turning button locks outside lever requiring use of key until button is manually unlocked. Pushing button locks outside lever until unlocked with key or inside lever is turned. Deadlocking latchbolt operated by inside lever at all times.
	Z-84 Z-84IC	Classroom	F84	Deadlocking latchbolt operated by lever from either side except when outside lever is locked from outside by key. When outside lever is locked, latchbolt is operated by key in outside lever or by rotating inside lever.
	Z-86 Z-86IC	Storeroom	F86	Deadlocking latchbolt operated by key in outside lever or rotating inside lever. Outside lever is always locked.
	Z-SD	Single Dummy		Single dummy trim for one side of the door. Lever is rigid.

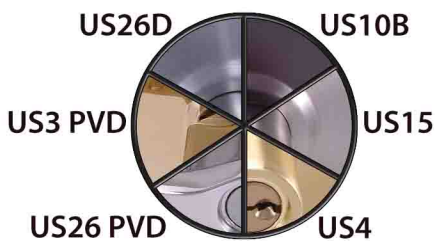

### Stock Finishes

US26D Brushed/Satin Chrome

### Special Order Finishes

- US3 PVD\* Bright/Polished Brass
  - US4 Brushed/Satin Brass
  - US5 Antique Brass
  - US10B Oil Rubbed Bronze
  - US15 Brushed/Satin Nickel
  - US26 PVD\* Bright/Polished Chrome
- \*\*Special order finishes require 12 week leadtime

\*PVD Lifetime Finish Standard on US3 and US26 finishes.  
PVD = Physical Vapor Deposition

## How to Order

Series    Function    Lever Design    Finish  
Z — 82 — F — US26D

### Lever Abbreviations

Flat = F  
Curved = C

Note: Special order finishes have a 12 week leadtime & \$5 net add.