



K2 SERIES FUNCTIONS & OPTIONS

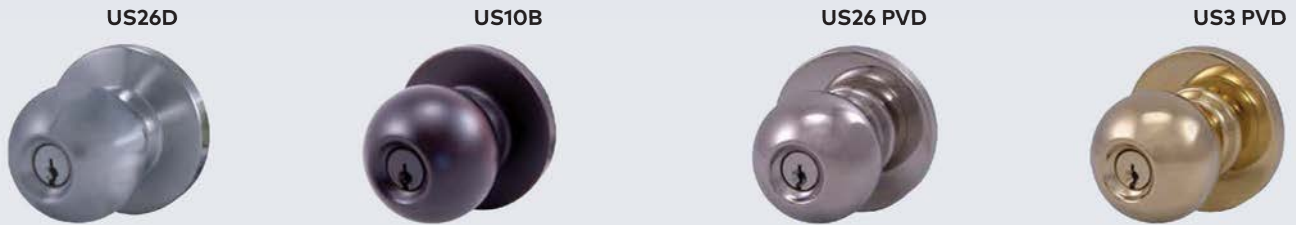

Outside/ Inside	Series/ Function	Type	ANSI No.	Function Description
	K2-75	Passage	F75	Latchbolt operated by knob from either side at all times.
	K2-76	Privacy	F76	Latchbolt operated by knob from either side. Outside knob is locked by push button inside and unlocked by emergency release outside, rotating inside knob or closing door.
	K2-82	Entry/Office	F82	Turn/Push button locking. Pushing and turning button locks outside knob requiring use of key until button is manually unlocked. Pushing button locks outside knob until unlocked with key or inside knob is turned. Deadlocking latchbolt operated by inside knob at all times.
	K2-84	Classroom	F84	Deadlocking latch bolt operated by knob from either side except when outside knob is locked from outside by key. When outside knob is locked, latchbolt is operated by key in outside knob or by rotating inside knob.
	K2-86	Storeroom	F86	Deadlocking latchbolt operated by key in outside knob or rotating Inside knob. Outside knob is always locked.
	K2-SD	Single Dummy		Single dummy trim for one side of the door. Knob is rigid.

Stock Finishes



- US3 PVD* Bright/Polished Brass
- US10B Oil Rubbed Bronze
- US26 PVD* Bright/Polished Chrome
- US26D Brushed/Satin Chrome

*PVD Lifetime Finish Standard on US3 and US26 finishes.
PVD = Physical Vapor Deposition

How to Order

Series	Function	Knob Design	Finish	Knob Abbreviations
K2	- 82	- B	- US26D	B=Round Ball Knob